



Type DSL Series / 突波吸收器 Surge Absorber

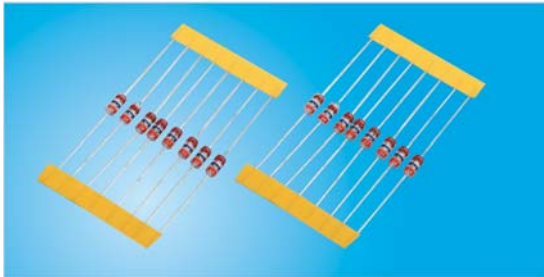

Dimensions(mm)尺寸

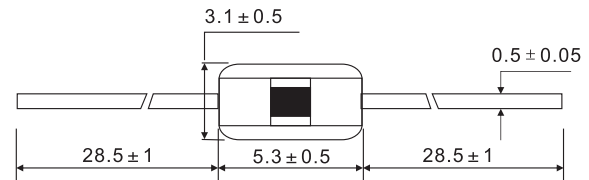

Features 特性

- Quick response
- Low capacitance
- Small size
- Low price

Applications 應用

- R.G.B and Grid of TV Monitor
- TEL,FAX,MODEM
- Power supply
- AUTO audio Frequency.navigation system

Electrical Specifications 電氣特性

Catalog Number 料號	DC Spark-Over Voltage 標稱直流擊穿電壓 100V/s Vs(V)	AC withstanding voltage 耐交流能力	Nom Impulse Discharge Current 耐衝擊電流 8x20μS kA	Nom Impulse Discharge Current 耐衝擊電流 8x20μs(A)	Insulation Resistance 絕緣電阻		Capacitance 電容值 C 1kHz<6V pF Max.
					Min. MΩ	DC V	
DSL-601M	600V ± 20%		1KA 1times	100A 300times	100	500	1.0
DSL-102M	1000V ± 20%				100	500	1.0
DSL-152M	1500V ± 20%				100	500	1.0
DSL-242M	2400V ± 20%	AC1200V-3sec	2KA 1times	100A 300times	100	500	1.0
DSL-302M	3000V ± 20%	AC1500V-1min			100	500	1.0
DSL-362M	3600V ± 20%	AC1800V-3sec			100	500	1.0
DSL-452M	4500V ± 20%	AC2000V-1min			100	500	1.0
DSL-622M	6200V ± 20%	AC3000V-1min			100	500	1.0

AXIAL TAPING 直線編帶	符號	尺寸(mm)
	W	58 ± 1.5
	P	5.0 ± 0.5
	L1-L2	1max
	T	6.0 ± 1.0
	Z	1.2max
	R	Terminals must not project from tape
	t	3.2min
	S	0.8max
	D1	Φ 0.5 ± 0.05
	L	5.8Max

Materials 材料

Ceramic : Ceramic Rod
 Metallization of Glass body
 End termination:Dumet wire
 End termination overcoat: Tin

Operation Temperature 工作溫度

-40℃ to 125℃

Packaging 包裝

On Taping:DSL series-1500pcs Per Reel
 DSL series-15000pcs outer box